


# **PEGASO 2**



Double unit electro-pneumatic drilling machine

Overall dimensions:




	A (mm)	B (mm)	C (mm)	Kg
bed				
m. 1,6	1550	800	1350	330
bed				
m. 3	3000	800	1350	450



### **Technical characteristics:**

- Automatic drill bit downstroke with rapid approach
- First and second mobile head
- Pneumatically adjusted drilling c/c distance with two preset positions
- Quick drilling axis distance adjustment on bar with mechanical stops in 8 preset positions
- Possibility of drilling with different distance first and second head axes; max 60mm
- Drilling c/c distance min=25mm, max = 180mm.
- Cutting lubrication by atomizer
- N° 2 three phase motors 0.75 KW (1Hp), 900 rpm. eurovoltage 230/400V- 50Hz; 275/480V 60 Hz.
- Spindle rotation speed 1800 rpm.
- Bit shank Ø 10mm
- Vertical spindle stroke 80mm
- Max. profile clamping dimensions 110 x 120 h mm

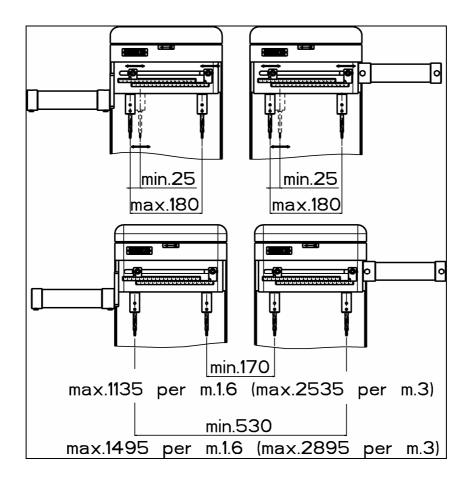



#### **STANDARD ACCESSORIES:**

N°	Description	Code
4	Double diameter drill 6/12 mm	HZ 37305
	Horizontal vice	

## **OPTIONALS:**


Description	Code	
Vice jaw extension 280 mm (Rh/Lh) with 1 receding stop	PR-22626	
Additional receding stop	PR-24240	
Additional stop ledge	PR-24322	
Micro-drop pure oil blade lubrification system	PR-25211	
Collet-holder spindle kit ø 5/7 mm	PR-22618	
Additional vertical drilling unit complete	On estimate	
Additional charge for special voltage and cycle		
Note: For single head	ZG-79126	
(Standard motor 230/400V three-phase 50 Hz)		
Additional charge for single-phase motor		
Note: For single head	ZG-79127	
(Standard motor 230 single-phase 50 Hz)		
Additional charge for plant version UL-CSA		
(The additional charge includes motors with special voltage/measurement	ZG-79158	
unit in inches)		



## PACKING

Description	Code
Crate packing	FC-72842
Crate packing	FC-72843

Crate packing overall dimensions:



	A (mm)	B (mm)	C (mm)	Kg
bed				
m. 1,6	3150	900	1500	453
bed				
m. 3				