

TURBO2





Turbine swarf exhauster.

Overall dimensions:

FRONT

SIDE

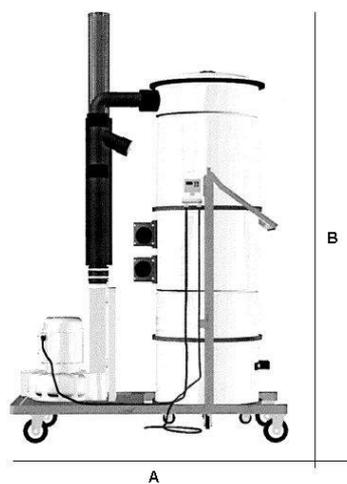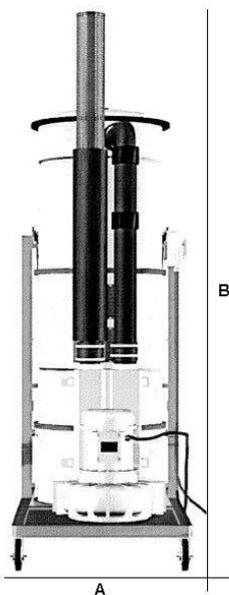

	A (mm)	B (mm)
SIDE	1450	1850
FRONT	760	1850

Technical characteristics:

- Available in the version for connection to double head machine
- Max capacity mc/h=580
- Max vacuum 150 mbar
- Power rating 5,5 kW

OPTIONALS:

Description	Codice
Joint ø 80 mm for flex hose	CA-76234
Reduction ø 80/100 mm	CA-76235
Stop valve for flex hose	BT-76236
Joint for connecting the workshop cleaning kit	CA-76237
Workshop cleaning kit	PR-24895
Smoke filter	BY-77201
Glass wool for silencer	BY-78588
Gasket	EO-77954
Flex hose ø 80 mm (per meter)	AV-76243
Additional charge for special voltage and cycle (Standard motor 230/400V three-phase 50 HZ)	ZG-79126
Additional charge for plant version UL-CSA (The additional charge includes motors with special voltage/measurement unit in inches)	ZG-79158
Spare filter	

Carton pallet packing with heat-shrink plastic bag:

A (mm)	B (mm)	C (mm)	Kg