


PANDA 550 THETA

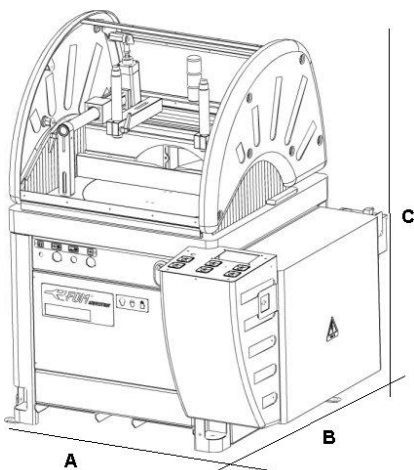

A (mm)	B (mm)	C (mm)	Kg
1440	1385	1715	827


Technical characteristics:

- Oleopneumatic saw blade advance (adjustable blade exit speed – quick return)
- Rotation from 20°Lh to 20°Rh on vertical axis
- Axis movement by DC motor
- Positioning accuracy of cutting angle $\pm 0.01^\circ$
- Axis position reading by means of magnetic band
- Motor – tungsten carbide saw blade transmission by belt
- Machine and turntable structure in stabilized cast iron
- Turntable rotation on bearings and rollers that guarantees maximum long term precision
- Working pressure: 7 bar
- Saw blade motor, three phase 4 HP (2,94 Kw) – 2800 rpm. eurovoltage 230/400V– 50Hz; 275/480V – 60 Hz.
- Microdrop cutting lubrication using pure oil
- Prearranged for installation of chip or smoke collectors

NANO VISION

- Industrial type numerical control
- Easy to read back-lit alphanumeric display, 20 characters on 2 lines
- Program for controlling cutting angle

CUTTING VISION:

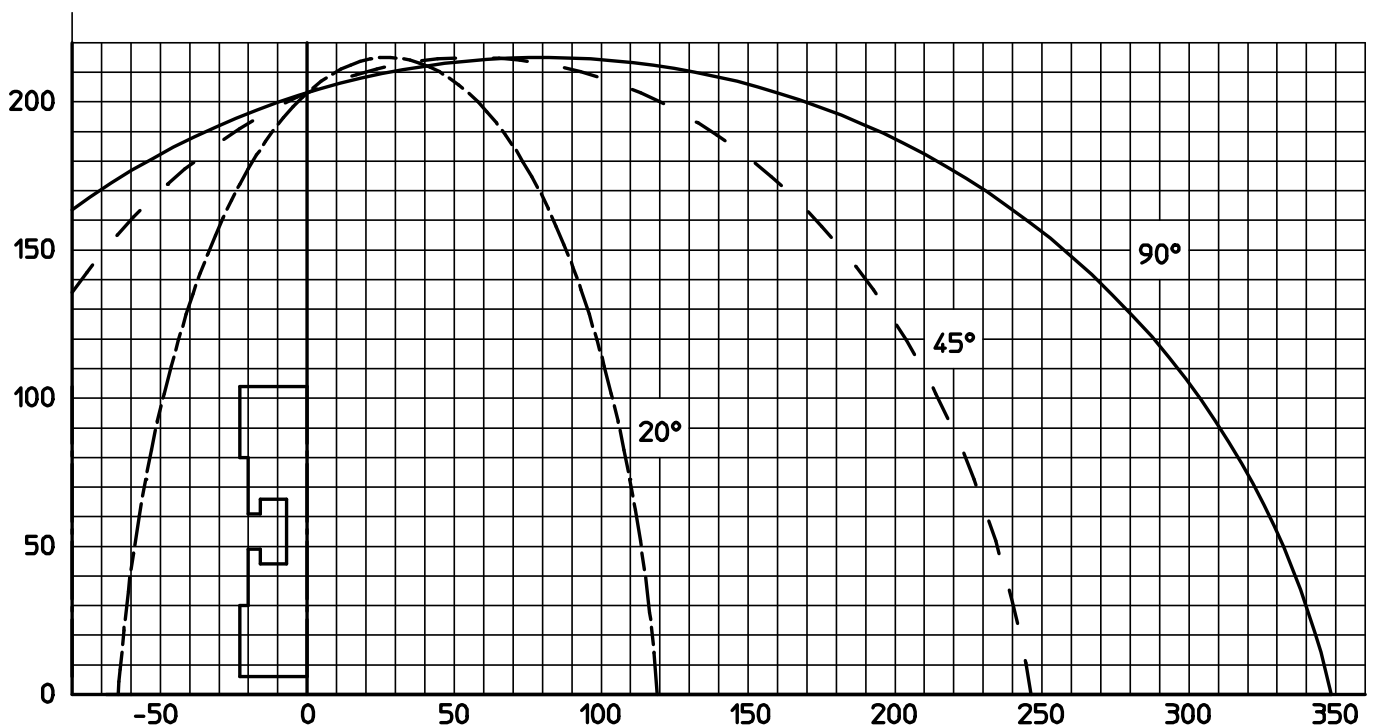


STANDARD ACCESSORIES:

n°	Description
1	Ø 550 mm tungsten carbide saw blade
2	Vertical vices
1	Horizontal vice
1	Cutting area guard kit
1	Compressed air gun with spiral hose (for machine cleaning)
	Micro-drop pure oil blade lubrication system
	Prearranged for installation of chip or smoke collectors
	Packing with heat-shrink plastic bag

OPTIONALS:


n°	Description	Code
1	Set of camping supports (profile type to be specified)	On estimate
1	Kit jointing Assomak 400	PR-26557
1	Additional horizontal vice	PR-25850
	Discharge roller table with lenght stop: manual, displayed, controlled	See roller tables
1	3 Mt. cutting lenght	PR-24201
1	4,2 Mt. cutting lenght	PR-25170
1	6 Mt. cutting lenght	PR-25213
	Loading roller table with vertical roller	See roller tables
1	3 Mt. cutting lenght	PR-22077
1	4,2 Mt. cutting lenght	PR-25169
1	Additional roller for roller table	PR-22166
	Additional charge for special voltage and cycle (Standard motor 230/400V three-phase 50 HZ)	ZG-79250
	Additional charge for plant version UL-CSA (the additional charge includes the plant with cables and special components)	ZG-79157
	Carton pallet packing	FF-79137
	Crate packing	FC301616

Carton pallet packing with heat-shrink plastic bag:



A (mm)	B (mm)	C (mm)	Kg
1510	1430	1720	847

Crate packing overall dimensions:



A (mm)	B (mm)	C (mm)	Kg
1510	1430	1720	944