


## MIRAGE




Electropneumatic sawing machine with up-feed blade and automatic feeding device.



	A (mm)	B (mm)	C (mm)	Kg
Feeding 600 mm	1240	1000	1300	320
Feeding 1000 mm	1640	1000	1300	350

### Technical specifications:

- Mechanical feeder with max. stroke 600 mm or 1000 mm depending on version
- Tungsten carbide  $\varnothing$  400 mm saw blade
- Oleopneumatic saw blade advance (adjustable blade exit speed – quick return)
- Adjustable blade stroke
- 90° cuts on vertical axis
- Positioning accuracy  $\pm$  0.1 mm
- Chips collected in dedicated drawer
- Maximum cut piece waste 90mm
- Pieces count function
- Possibility of single cutting with manual stop supplied
- Motor – tungsten carbide saw blade transmission by belt
- Working pressure: 7 bar
- Saw blade motor, three phase 5.5 HP (4 Kw) – 2800 rpm. eurovoltage 230/400V– 50Hz; 275/480V – 60 Hz.
- Microdrop cutting lubrication using pure oil
- Set up for the installation of chips and fumes collectors

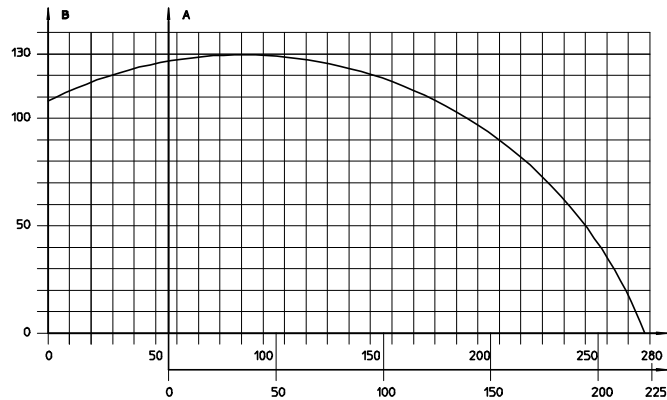**CUTTING DIAGRAM:**

**STANDARD ACCESSORIES:**

n°	Description
1	Disco in widia Ø 400 mm
1	Integral guard kit
1	Vertical vices
2	Horizontal vices
2	Horizontal vices for sliding bar
	Micro-drop blade lubrication system using pure oil
	Set up for forced evacuation of chips and fumes collectors


**OPTIONALS:**

n°	Description	Code
1	Special vices	On estimate
	Drilling unit	On estimate
1	Saw blade Ø 400 S=3 Z=72 Note: for thick profile	GP304166
1	Additional vertical vice	PR-23566
1	Loading roller table with vertical rollers, 3 Mt.	PR-22077
1	Loading roller table with vertical rollers, 4,2 Mt.	PR-25169
1	Additional roller for roller tables	PR-22166
	Additional charge for special voltage and cycle (Standard motor 230/400V three-phase 50HZ)	ZG-79126
	Additional charge for single-phase motor (Standard motor 230 single-phase 50HZ)	ZG-79127
	Additional charge for plant version UL-CSA (The additional charge includes the plant with cables and special components)	ZG-79158

**PACKING:**


Description	Code
Carton packing.(For Mirage 600 XZ-10029)	FF-75008
Crate packing (For Mirage 600 XZ-10029)	FC-71179
Carton packing.(For Mirage 1000 XZ-10407)	FF-77470
Crate packing (For Mirage 1000 XZ-10407)	FC-77472

Carton pallet packing with heat-shrink plastic bag:



	A (mm)	B (mm)	C (mm)	Kg
Mirage 600 XZ-10029	1400	1050	1650	338
Mirage 1000 XZ-10407	Da aggiornare	Da aggiornare	Da aggiornare	Da aggiornare

Crate packing overall dimensions:



	A (mm)	B (mm)	C (mm)	Kg
Mirage 600 XZ-10029	1320	1030	1320	392
Mirage 1000 XZ-10407	1720	1030	1320	430