


ASSOMAK BRAIN



Roller table with electronic length stop positioning control.

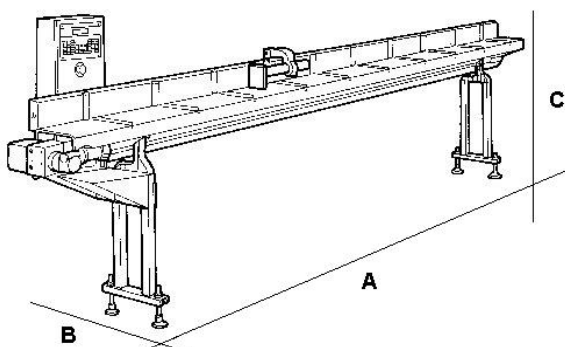

	A(mm)	B(mm)	C(mm)	Kg
m. 3	3.600	470	1.480	128
m. 4,2	4.800	470	1.480	168
m. 6	6.600	470	1.480	224

Technical characteristics:

- Minimum cut 0 mm
- Measurement reading by encoder
- Positioning precision ± 0.5 mm
- Loading capacity per linear metre: 3 Kg
- Width of bar resting surface: 400 mm
- Patented length stop with sliding surface under the work table, to give constant reference under all working conditions

LORAN

- Industrial type numerical control
- Easy to read back-lit alphanumeric display
- Semi-automatic program for controlling the roller table with length stop
- Bar height save function with calculation of cutting length compensation
- Dedicated software for saving and cutting formula and types
- Dedicated software for entering cutting list from the keypad
- Calculator function

STANDARD ACCESSORIES:

Description
Length positioning by encoder
Positioning accuracy $\pm 0,5$ mm
Loading capacity: Kg. 3 per meter
Plastic-cover steel rollers
Carton packing


OPTIONALS:

Description	Code
Software licence for formulas and typologies	ZB-73705
Software licence for entering data by keyboard	ZB-78138
Bar-code optical reader	PR-26673
Additional charge for plant version UL-CSA (The additional charge includes the plant with cables and special components/measurement unit in inches)	ZG-79158

PACKING

Description	Code
Crate packing – Mt. 3	FC-74426
Crate packing – Mt. 4.2	FC-76770
Crate packing – Mt. 4.2	FC-78063
Crate packing – Mt. 6	FC-74429
Crate packing for cabinet display	FC-74115

Crate packing overall dimensions:

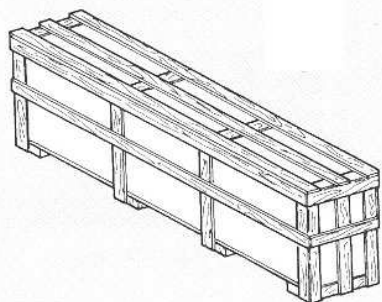

	A (mm)	B (mm)	C (mm)	Kg
m. 3	3700	400	470	159
m. 4,2				
m. 4,2	4850	700	800	
m. 6	700	400	470	
Equipment	630	410	850	17