


## ASSOMAK 400 VS



Roller table with manual length stop positioning by handwheel and electronic display of measurement.

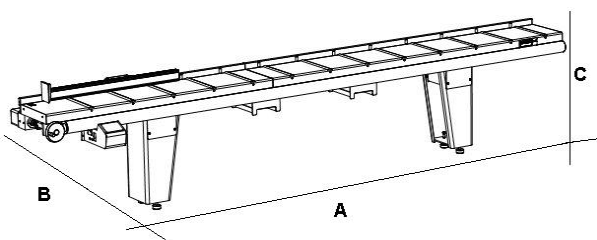

	A(mm)	B(mm)	C(mm)	Kg
<b>m. 4,2</b>	4760	760	1010	170

**Technical characteristics:**

- Pneumatic stop locking
- Minimum cut 0 mm
- Measurement reading by encoder
- Positioning precision  $\pm 0.5$  mm
- Loading capacity per linear metre: 6 Kg
- Width of bar resting surface: 400 mm
- Patented length stop with sliding surface under the work table, to give constant reference under all working conditions

**SIMPLE**

- Industrial type numerical control
- Rear-illuminated alphanumeric display
- Bar height save function with compensation for  $45^\circ$  cuts
- Possibility of quick profile height correction due to extrusion and/or paint thickness tolerances
- Length display
- Calculator function

**STANDARD ACCESSORIES:**

Description	Code
Pneumatic stop locking	PR 22134
Loading capacity: Kg. 6 per meter	
Belt-driven positioning	
Plastic rollers	
Carton packing	


**OPTIONALS:**

Description	Code
Joint kit for Assomak 400 VS-Kaiman (RH)	PR-25852
Joint kit for Assomak 400 VS-Kaiman (LH)	PR-25950
Additional roller for roller table	PR-22166

**PACKING**

Description	Code
Crate packing – Mt. 4.2	FC-76821
Crate packing – Mt. 4.2	FC-78063

Crate packing overall dimensions:

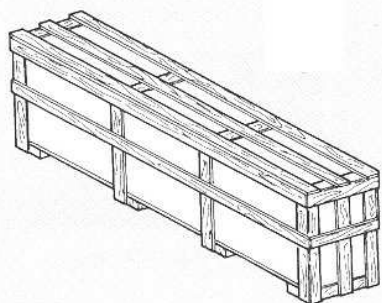

	A (mm)	B (mm)	C (mm)	Kg
<b>m. 4,2</b>	4860	290	440	212
<b>m. 4,2</b>	4850	700	800	