


SPRING 45 MANUAL



Single head sawing machine with \varnothing 450 mm front blade and manual cutting angle control.

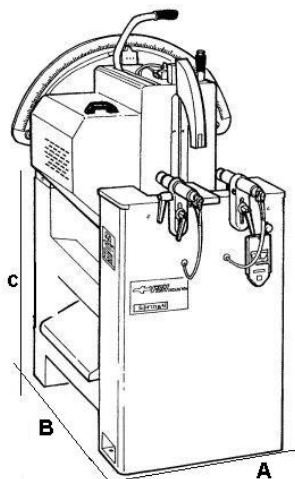


A (mm)	B (mm)	C (mm)	Kg
900	1180	1480	380

Technical characteristics:

- Tungsten carbide \varnothing 450 mm saw blade
- Manual saw blade advance
- Cutting angle from 20°Lh to 20°Rh on horizontal axis
- Saw blade safety guard
- 2 pneumatic, horizontal vices
- Cutting lubrication by atomizer
- Set up for the installation of chips and fumes collectors
- Direct motor – tungsten carbide saw blade transmission
- Double working pressure servo-controlled in low pressure
- Working pressure: 7 bar
- Total dimensions 900 x 1180 x 1480h mm, weight 380 Kg.
- Saw blade motor, three phase 3 HP (2.208 Kw) – 2800 rpm. eurovoltage 230/400V– 50Hz; 275/480V – 60 Hz.
- Saw blade holding spindle \varnothing 32
- Work cycle air consumption 1.5 NI

CUTTING DIAGRAM:

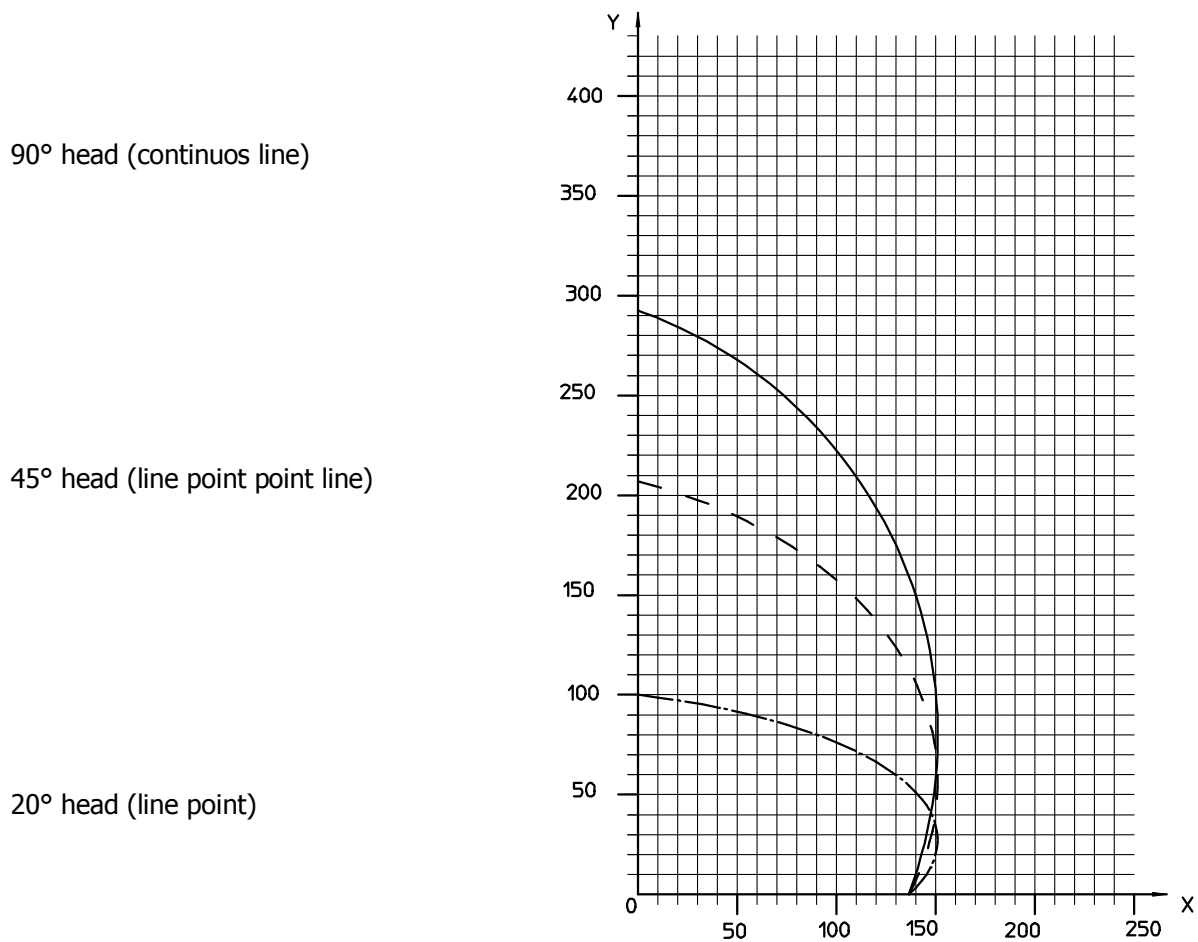


STANDARD ACCESSORIES:

n°	Description
1	Ø 450 mm tungsten carbide saw blade
	Blade safety guard
2	Pneumatic horizontal vices
	Set up for forced evacuation of chips and fumes collectors
	Imballo sacco termoretraibile

OPTIONALS:


n°	Description	Code
1	Set of clamping supports (profile type to be specified)	On estimate
1	Micro-drop pure oil blade lubrication system	PR 25209
	ASSOMAK Rulliere lato scarico con battuta di riscontro: manuali, visualizzate, controllare (imballo compreso)	
1	3 Mt. cutting length	PR 24201
1	4,2 Mt. cutting length	PR 25170
1	6 Mt. cutting length	PR 25213
	Rulliera lato carico con rulli verticali	Vd rulliere
	3 Mt. cutting length	PR 22077
	4,2 Mt. cutting length	PR 25169
1	Loading roller table with vertical rollers	PR 22166
	Additional charge for special voltage and cycle (Standard motor 230/400V three-phase 50HZ)	ZG-79126
	Additional charge for single-phase motor (standard motor 230 single-phase 50HZ)	ZG-79127
	Additional charge for plant version UL-CSA (the additional charge includes the plant with cables and special components)	ZG-79158
	Carton packing	FF 72142
	Crate packing	FC 75365

Carton pallet packing with heat-shrink plastic bag:



A (mm)	B (mm)	C (mm)	Kg

Crate packing:

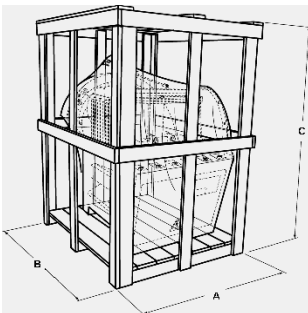

A (mm)	B (mm)	C (mm)	Kg