


KAIMAN PIX 700 F



Single head sawing machine with up-feed blade for 90° cuttings. The structure, made with fusions of aluminium, cast iron and mechanical structural steelwork, assures good precision reliability.

The machine meets the CE requirements.

Overall dimensions:

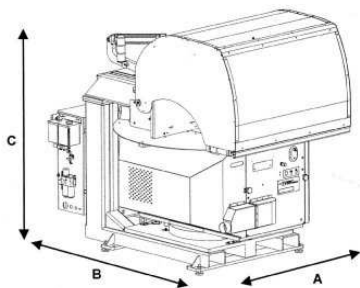


A (mm)	B (mm)	C (mm)	Kg
1480	1990	1840	1500

Technical characteristics:

- Tungsten carbide \varnothing 700 mm saw blade
- Hole \varnothing 50 mm
- Speed blade turning 2.200 RPM
- Oleopneumatic or hydraulic advance of tungsten carbide blade depending on version (adjustable blade exit speed – quick return)
- Taglio a 90° fisso
- Integral guard kit around cutting area with automatic closing
- 2 vertical vices and 2 horizontal vices
- Microdrop cutting lubrication using pure oil
- Motor – tungsten carbide saw blade transmission by belt
- Working pressure: 7 bar
- Saw blade motor, three phase 7.47HP (5.5 Kw) – 2800 rpm. eurovoltage 400/690V– 50Hz
- Prearranged for installation of chip or smoke collectors

Cutting Diagram

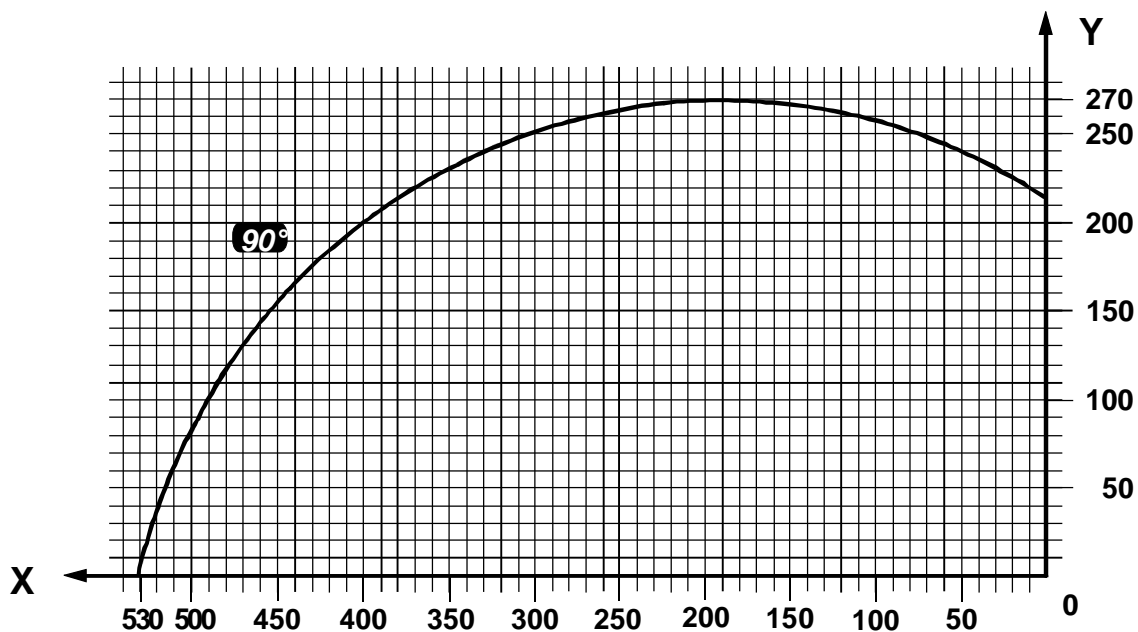


STANDARD ACCESSORIES

n°	Description
1	Ø 700 mm tungsten carbide saw blade
2	Horizontal and vertical vices
1	Micro-drop pure oil blade lubrication system
	Packing with heat-shrink plastic bag

OPTIONALS


n°	Description	Code
	Set of clamping supports (profile type to be specified)	
	ASSOMAK CR (4,9 Mt. cutting length)	XZ 10517
	ASSOMAK 400 BRAIN (4,2 Mt. cutting length)	XZ 10519
	ASSOMAK 400 VS (4,2 Mt. cutting length)	XZ 10520
	Discharge roller table 400 (2,8 Mt. cutting length)	PR 26281
	Length stop kit with manual adjustment for PR 26281	PR 26136
	Loading roller table with vertical rollers 400 (4,7 Mt. cutting length)	PR 25854
	Join kit for roller bar or Assomak (right side)	PR 25852
	Join kit for roller bar or Assomax (left side)	PR 25950
	Additional charge for special voltage and cycles (Standard motor 400V three-phase 50Hz)	ZG 79250
	Additional charge for plant version UL-CSA (The additional charge includes the plant with cables and special components)	ZG 79157
	Crate packing + cabinet display	FC 76765

Carton pallet packing with heat-shrink plastic bag:



A (mm)	B (mm)	C (mm)	Kg

Crate packing overall dimensions:



A (mm)	B (mm)	C (mm)	Kg